

**Producteur :** ATHIS  
**Granulats :** GRAVE 0/14  
**Péetrographie :** Alluvions silico-calcaire  
**Elaboration :** Semi concassé

**Utilisateur :** Contrôle externe

**Partie contractuelle**  
Valeurs spécifiées sur lesquelles le producteur s'engage

Classe granulaire

Norme

Catégorie

0 14

Norme NF P 18-545 Article 7 - EN 13242


Code Cb (04/01/2012)

	0.063	0.08	0.125	0.25	0.315	0.5	1	2	3.15	4	5	6.3	8	10	11.2	12.5	14	16	20	22.4	31.5	MB	MB0/D	
V.S.S.+U	15.0											93.0					100.0		100.0			2.50	0.95	
V.S.S.	13.0											90.0					99.0		100.0			2.00	0.80	
V.S.I.	7.0											70.0					89.0		98.0		100.0			
V.S.I.-U	5.0											67.0					87.0		97.0		100.0			
Ecart-type max												6.06												

**Partie informative**  
Résultats de production

du 20/04/11 au 12/12/11

	0.063	0.08	0.125	0.25	0.315	0.5	1	2	3.15	4	5	6.3	8	10	11.2	12.5	14	16	20	22.4	31.5	MB	MB0/D	
Maximum	14.4	15.1	16.5	20.2	21.9	28.0	39.4	59.1	73.4	78.7	85.2	91.1	95.7	97.6	98.5	99.4	100.0	100.0	100.0	100.0	100.0	100.0	0.89	0.48
Xf+1.25xEcart-types	12.7	13.2	14.2	17.4	19.3	24.1	34.8	53.4	66.9	74.1	80.9	87.6	93.4	96.8	98.0	99.0	100.0	100.0	100.0	100.0	100.0	100.0	0.83	0.41
Moyenne Xf	10.2	10.5	11.3	13.8	15.4	19.1	28.0	44.2	57.5	65.2	72.6	80.3	87.4	92.8	94.7	96.8	98.1	99.2	100.0	100.0	100.0	100.0	0.72	0.32
Xf-1.25xEcart-types	7.7	7.8	8.5	10.3	11.6	14.0	21.2	35.0	48.0	56.2	64.2	73.0	81.3	88.8	91.5	94.6	96.1	97.9	99.7	100.0	100.0	100.0	0.61	0.22
Minimum	6.5	6.6	7.0	8.7	10.1	12.7	20.5	33.0	46.1	54.5	63.2	70.4	78.0	85.9	87.6	93.1	94.7	96.5	99.0	100.0	100.0	100.0	0.49	0.18
Ecart-type	2.01	2.13	2.31	2.81	3.11	4.07	5.45	7.39	7.58	7.16	6.66	5.84	4.81	3.20	2.62	1.76	1.56	1.08	0.21	0.00	0.00	0.088	0.076	
Nombre de résultats	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	19	19	

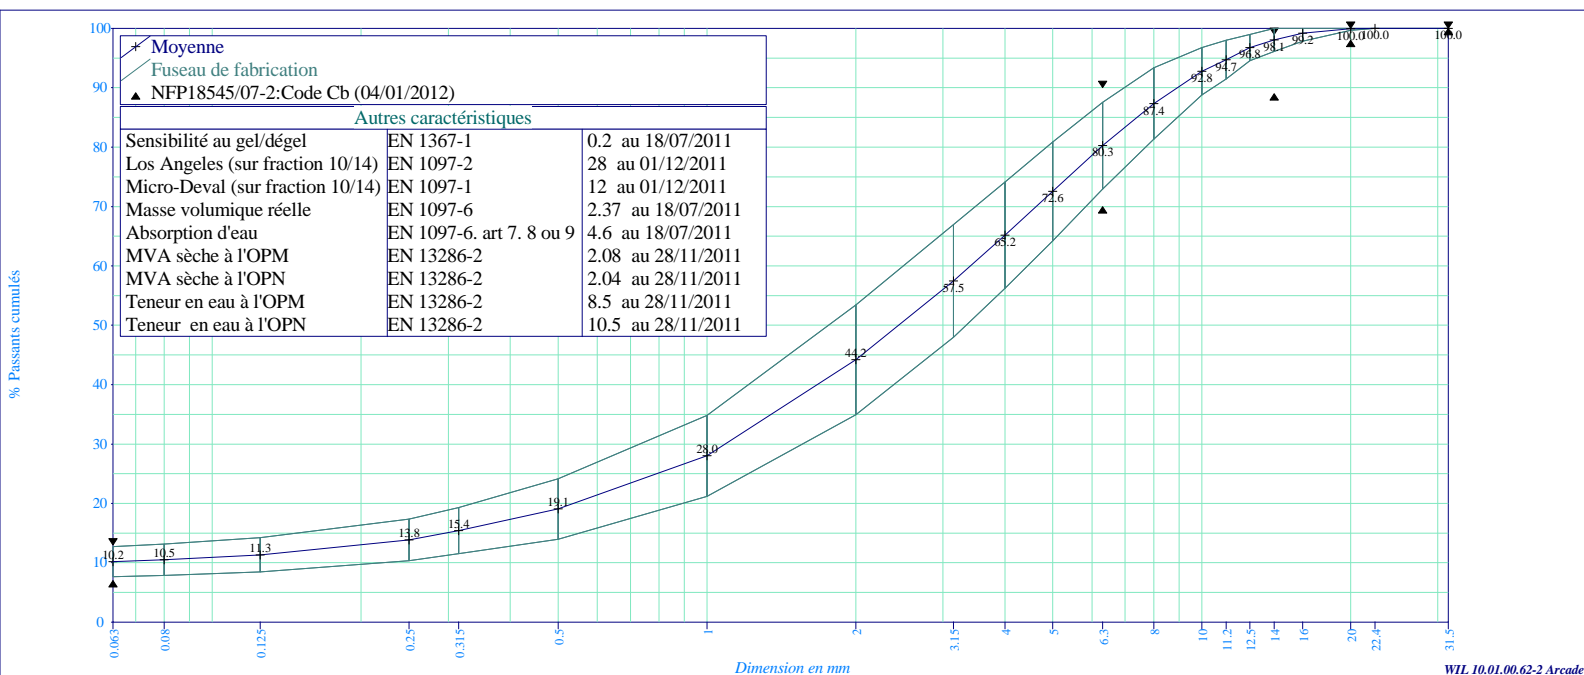

SIGNATURE